

RR-F60G & RR-FS60G

R & R Fire & Sound Proof Building Materials Ltd. 戶信防火隔音建材有限公司
Companhia De Obras De Isolamento Acustico R&R Limitada. 戶信隔音工程有限公司



"R&R" is a specialist in providing fire-resistance door, sound-proof (acoustic) door and sound proof solution for residential, commercial and industrial buildings.

Business through out:

- Hong Kong
- Macau
- PRC

"戶信" - 專業防火-隔熱-防煙-隔聲門生產商, 擁有專業團隊提供方案改善住家, 商業及工業樓宇的隔聲問題。

業務遍及:

- 香港
- 澳門
- 中國

Testing Standard (測試標準):

BS EN 1634-1:2008
BS EN 1634-3:2004 (BS EN 13501-2:2007+A1:2009)

FRR(防火時效): -/120/60

Smoke Control S_m & S_a * (防煙 \rightarrow 200度及室溫*): Pass 合格

Model (型號)	RR-F60G	RR-FS60G
Smoke Seal System (防煙系統)	-	✓
Door Leaf Height (門頁高度)	2700mm \wedge *	2700mm \wedge *
Door Leaf Width (門頁寬度)	1200mm \wedge *	1200mm \wedge *
Door Leaf Area (門頁面積)	2.88m ² \wedge *	2.88m ² \wedge *

*- Under latched and bolted conditions (鎖門情況下)


\wedge - Under unlatched and unbolted conditions (不鎖門情況下)

Vision Panel Height (視窗高度)	900mm	836mm
Vision Panel Width (視窗寬度)	150mm	150mm
Vision Panel Area (視窗面積)	0.115m ²	0.115m ²


寬度縮減可增加高度限制 (Reduction in width may be required for an increase in height, or vice versa)



Vision Panel Shape 視窗形狀

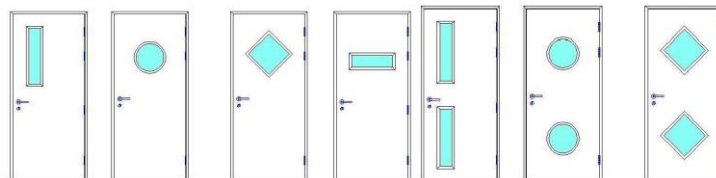

Frame Type 門框款式

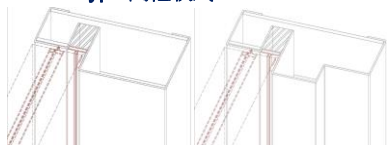

Single Rebate
單止口

Double Rebates
雙止口

Bottom Drop Seal 門底升降密封條

Made in ITALY 意大利製造



*Mechanism Remove inner profile from hinge side
可於門鉸位置套出內槽

Ironmongeries 小五金

- **Electronic Hotel Lock** 酒店電子拍卡鎖
- **Concealed Type Bottom Drop Seal** 暗藏門底密封條
- **Concealed Conduit for electric lock** 暗藏線管供電鎖使用
- **Flush Bolts** 暗插銷
- **Any Surface Mount Miscs. (w/o combustible parts)**

所有明裝配件 (不含易燃性的配件)

HK Office (香港辦事處)

G/F, No.90, Tai Nan St., Prince Edward, Kln

九龍太子大南街 90 號地下

T) +852 2398-8518 / 8578

F) +852 8147-2320

✉ andychoi@firedoor.com.hk

kkchoi@firedoor.com.hk

Macau Office (澳門辦事處)

Rua Nova A Guia No.200 R/C, Macau.

澳門 東望洋新街 200 號 地下

T) +853 6688 9907

F) +8532830 9453

✉ ho@firedoor.com.hk

PRC Office (國內工廠及辦事處)

15 Xingtang 2nd Rd, Baishi Village, SanXiang

Town, Zhongshan City

廣東省 中山市 三鄉鎮 白石村

興塘二路 15 號

T) +86 0760 86388834

F) +852 8147 2320

✉ kitty@firedoor.com.hk

General Enquiry (一般查詢)

✉ info@firedoor.com.hk

Acoustic (Sound-Proof) Function 隔音功能

- **Can achieve STC/Rw 43 – 47 (ASTM E90 & ISO Standard)***

可達到 STC/Rw 43-47 要求

Single Leaf Door 單掩門						
頻率(Hz)	125	250	500	1K	2K	4K
效果 Result	29	38	45	48	49	49
STC/Rw 45						

Singles Leaf Door w/ surface mount seal 單掩門 配明裝隔音配件						
頻率(Hz)	125	250	500	1K	2K	4K
效果 Result	31	40	45	50	51	51
STC/Rw 47						

Double Leaf Door w/ Vision Panel 雙掩門連視窗						
頻率(Hz)	125	250	500	1K	2K	4K
效果 Result	29	31	39	45	51	51
STC 43						

